




## BENDIT TABLE 3453-BB(B)-H-II(I)-K




BB(B)	COLORS	02 03	Black White		
		10	Alu Satinated		
FF	LED	26	<b>26</b> >90 CRI • 620 Lm / 26 W/m		
Н	COLOR TEMP.	2	2700 K		
		3	3000 K		
		4	4000 K		
	COLORS	02	Black		
11(1)		03	White		
II(I)		10	Alu Satinated		
		151	Bronze Dark		
К	DRIVER	1	No driver		
		0	Non dimmable (extern)		
		3	Dali (extern)		
		4	Phase cut (extern)		
Met	cal-Alu (	<b>(€</b> )(⊕	CC 850° (IP20)		








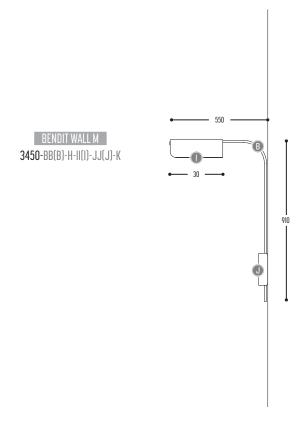

BB(B)	COLORS	02	Black White		
		10	Alu Satinated		
		10	7 II O GALINGTON		
FF	LED	26	>90 CRI • 620 Lm / 26 W/m (WALL M)		
- ' '			>90 CRI • 820 Lm / 26 W/m (WALL)		
	COLOR TEMP.	2	2700 K		
Н		3	3000 K		
		4	4000 K		
II(I)	COLORS	02	Black		
		03	White		
		10	Alu Satinated		
		151	Bronze Dark		
		131	BIOIIZE BUIN		
	COLORS	02	Black		
i it ii		03	White		
JJ(J)		10	Alu Satinated		
		151	Bronze Dark		
К	DRIVER	1	No driver		
		0	Non dimmable (intern)		
		3	Dali (extern)		
		4	Phase cut (intern)		





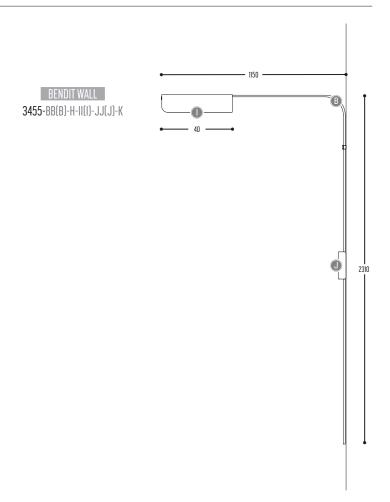


BB(B)	COLORS	02	Black White		
		10	Alu Satinated		
FF	LED	26	>90 CRI • 620 Lm / 26 W/m (WALL M) >90 CRI • 820 Lm / 26 W/m (WALL)		
Н	COLOR TEMP.	2	2700 K 3000 K		
		4	4000 K		
II(I)	COLORS	02 03 10 151	Black White Alu Satinated Bronze Dark		
JJ(J)	COLORS	02 03 10 151	Black White Alu Satinated Bronze Dark		
К	DRIVER	1 0 3 4	No driver Non dimmable (intern) Dali (extern) Phase cut (intern)		





BENDIT S **3454-**BB(B)-H-ii(i)-K

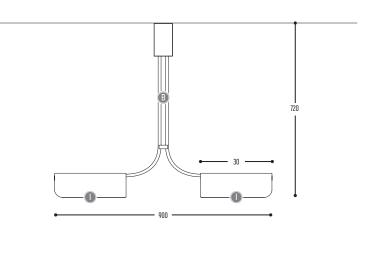

BB(B)	COLORS	02		Black	
		03		White	
		10		Alu Satinated	
FF	LED	26	>90 CRI • 2X 620 Lm / 26 W/m		
	COLOR TEMP.	2	2700 K		
Н		3	3000 K		
		4	4000 K		
II(I)	COLORS	02		Black	
		03		White	
II(I)		10		Alu Satinated	
		151		Bronze Dark	
	DRIVER	1	No driver		
К		0	Non dimmable (intern)		
I.		3	Dali (extern)		
		4	Phase cut (intern)		
Me	tal-Alu (	€	CC	850° [P20] — [F4]	

