



| | |
|-----------------------------|---------------------------------------|
| Index protection IP20 | Lifetime 50.000h |
| UGR < 13 | Colour temp. 2700K / 3000K / 4000K |
| Flicker Flicker free <5% | Technology LED |
| Step McAdam 3-SDCM | Guarantee 5 years |
| Driver Included | Class I |
| CRI > 90 | Voltage 230V |



16661-

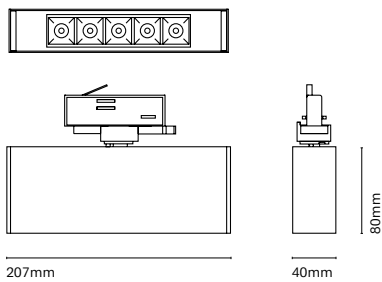

16662-

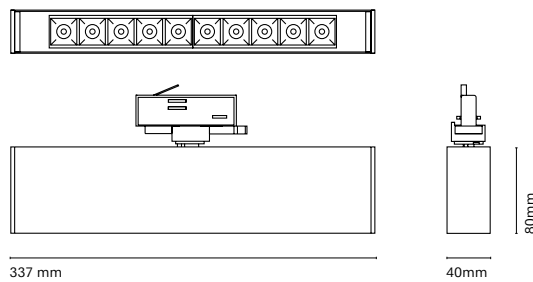

| | Colour | CRI/Temp. | Angle | Led | Dimming |
|--------|---------|-----------|-------|-----------------|----------------|
| 16661- | 0 White | H 927 | 1 12° | 0 620 lm / 5W | On-Off |
| | 1 Black | E 930 | 3 34° | 1 1050 lm / 10W | N Dali no-push |
| | 2 Grey | F 940 | 4 48° | | |

| | Colour | CRI/Temp. | Angle | Led | Dimming |
|--------|---------|-----------|-------|-----------------|----------------|
| 16662- | 0 White | H 927 | 1 12° | 1 1050 lm / 10W | On-Off |
| | 1 Black | E 930 | 3 34° | 3 2100 lm / 20W | N Dali no-push |
| | 2 Grey | F 940 | 4 48° | | |