




References

 SAT SP LED DIM0-10V

 SAT SP LED DIMBT

Certificates



Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Wood shade colours

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink



REF. SAT SP LED 21
Saturnia Small

Components



Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Matt satin acrylic



Metal canopy
Brushed Nickel
ø 17 cm

Electrical cable
Transparent 2 m drop




Steel cable
3 x 2 m drop



Box size
61 x 61 x 34 cm

Box volume
0,127 m³

Weight
Gross - 7,3 Kg
Net - 3,1 Kg



LED



Linear Module
4 x 5,5 W 350mA

Energy class



LED integrated



Driver




EFORE
1 unit - Ref. RCL030-0700B



EFORE
1 unit - Ref. RCL030-0700B
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in canopy.



ø 49

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	1866 lm	90	25 W	3000 K	40000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White

References



SAT SM LED DIM0-10V



SAT SM LED DIMBT

Certificates



Class I


Dimmable:
120 - 277VBluetooth Dimming:
220 - 240VThe mark of
responsible forestry

Wood shade colours

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink

REF. SAT SM LED 21
Saturnia Medium



Components

**Top diffuser**
Black or White**Note:** The standard top diffuser is white. Black is also available if you want no upward light diffusion.**Bottom diffuser**
Matt satin acrylic**Metal canopy**
Brushed Nickel
ø 17 cm**Electrical cable**
Transparent 2 m drop**Steel cable**
3 x 2 m drop**Box size**
117 x 114 x 50 cm
Wood crated
for transport**Box volume**
0,667 m³**Weight**
Gross - 39,5 Kg
Net - 7,9 Kg**LED****Linear Module**
6 x 8,1 W 700mA**Energy class**

LED integrated

**Driver**EFORE
1 unit - Ref. RCL050-1400BEFORE
1 unit - Ref. RCL050-1400B
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in canopy.

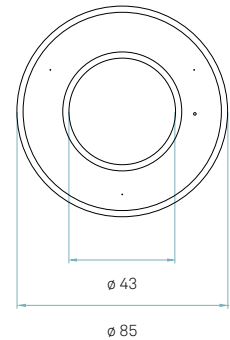
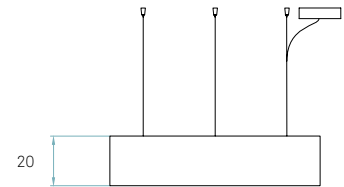


Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	4593 lm	90	57 W	3000 K	40000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White

References



Certificates



Class I

Dimmable:
120 - 277VBluetooth Dimming:
220 - 240V

Wood shade colours


- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

REF. SAT SG LED 24
Saturnia Large

Components

**Top diffuser**
Black or White


Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

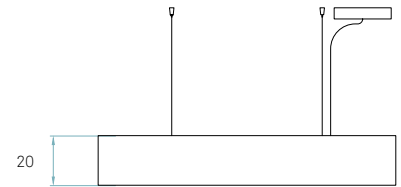Bottom diffuser
Matt satin acrylic**Metal canopy**
Brushed Nickel
ø 23 cm**Electrical cable**
Transparent 2 m drop**Steel cable**
4 x 2 m drop**Box size**
139 x 139 x 37 cm
Wood crated for transport**Box volume**
0,715 m³**Weight**
Gross - 55,3 Kg
Net - 15,3 Kg**LED**Linear Module
9 x 8,1 W 700mA**Energy class**

LED integrated

**Driver**EFORE
1 unit - Ref. RCL030-0700B
1 unit - Ref. RCL050-1400BEFORE
1 unit - Ref. RCL030-0700B
1 unit - Ref. RCL050-1400B
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in canopy.

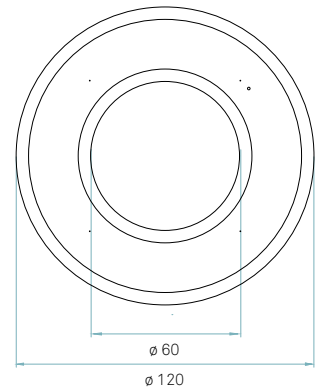

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	6890 lm	90	85 W	3000 K	40000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White